


## MEASURING REPORT

FastVoice Blog  
 Zertifizierung gemäß CIE  
 LEDARE 202-225-52  
 Datum 2014-01-07  
 Verbrauch 10,1 W  
 Powerfactor 0,88

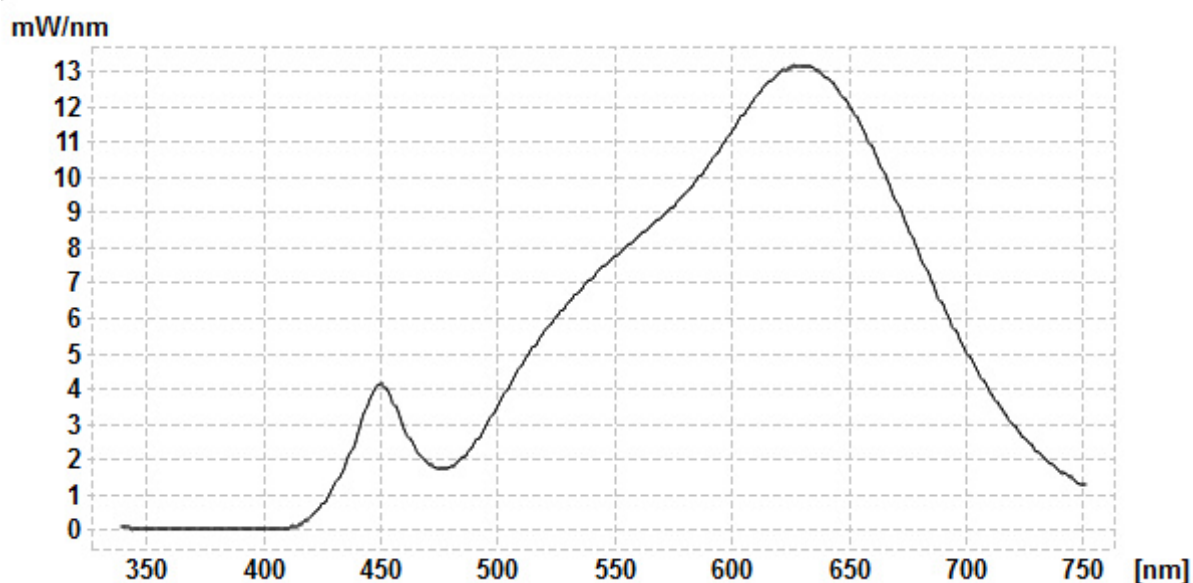

### Results

#### Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4623	x = 0,4681
y = 0,4140	y = 0,4099
Y = 599,93 lm	Y = 627,16
X = 669,89	X = 716,23
Y = 599,93	Y = 627,16
Z = 179,15	Z = 186,81

#### Andere

Correlated Color Temperature (CCT) = 2692 K  
 Chromaticity Error = 0,002  
 Color Peak = 630,62 nm

Color Peak Value = 13,15  
Lambda2 = 155,53 nm  
Radiometric = 2144,22 mW  
Color Dominant = 583,9 nm

**Farbwiedergabeindex**

Ra = 92,0

R1 = 92,6; R2 = 93,9; R3 = 93,3; R4 = 93,2; R5 = 91,3; R6 = 91,9; R7 = 94,2; R8 = 85,2; R9 = 65,0;  
R10 = 84,3; R11 = 93,4; R12 = 79,4; R13 = 92,6; R14 = 95,2