


MEASURING REPORT

FastVoice Blog
 Zertifizierung gemäß CIE
 LCTW ArtNr: 3008
 Datum 2014-01-03
 Verbrauch: 3,8W

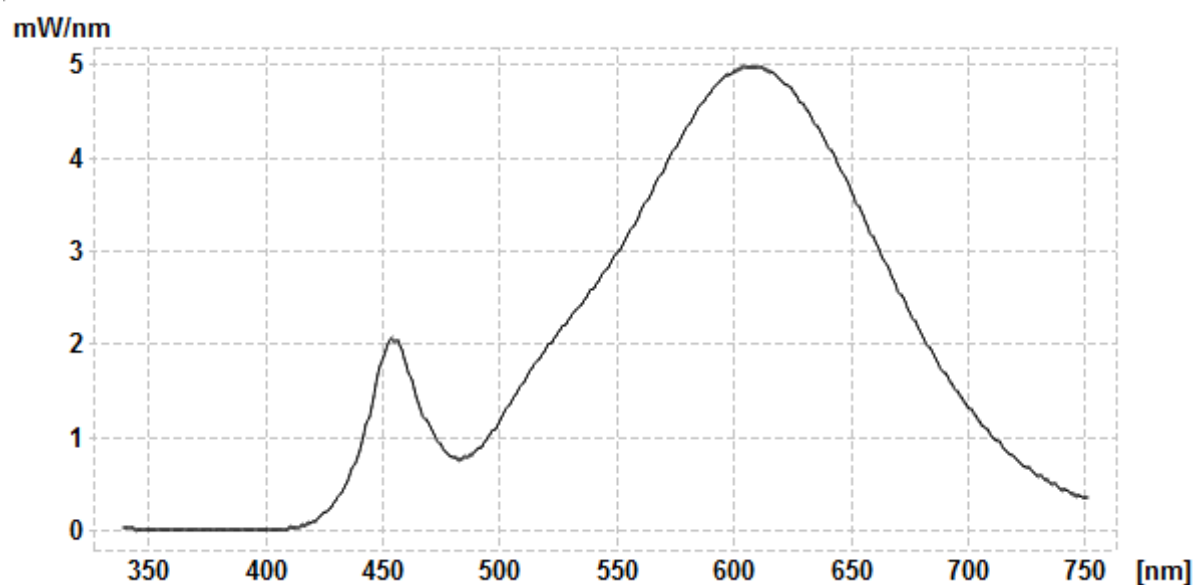

Results

Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4570 y = 0,4081 Y = 239,04 lm	x = 0,4638 y = 0,4032 Y = 249,85
u' = 0,2618 v' = 0,5260	u' = 0,2684 v' = 0,5251
L = 70,04 a = 14,28 b = 45,78	L = 69,70 a = 17,64 b = 45,67
X = 267,72 Y = 239,04 Z = 79,01	X = 287,38 Y = 249,85 Z = 82,41

Andere

Correlated Color Temperature (CCT) = 2720 K

Chromaticity Error = 0,004

Color Peak = 607,00 nm

Color Peak Value = 4,97

Lambda2 = 135,12 nm

Radiometric = 772,79 mW

Color Dominant = 584,3 nm

Metamerieindex

Mlvis = 2,7

Miuv = 4,0

Farbwiedergabeindex

Ra = 82,2

R1 = 80,2; R2 = 90,1; R3 = 96,7; R4 = 78,3; R5 = 79,4; R6 = 86,8; R7 = 83,9; R8 = 61,8; R9 = 16,9;

R10 = 76,8; R11 = 75,3; R12 = 68,0; R13 = 82,2; R14 = 98,4