


## MEASURING REPORT

FastVoice Blog  
 Zertifizierung gemäß CIE  
 LEDARE LED 302-181-87  
 Datum 2014-01-07  
 Verbrauch 4,3 W

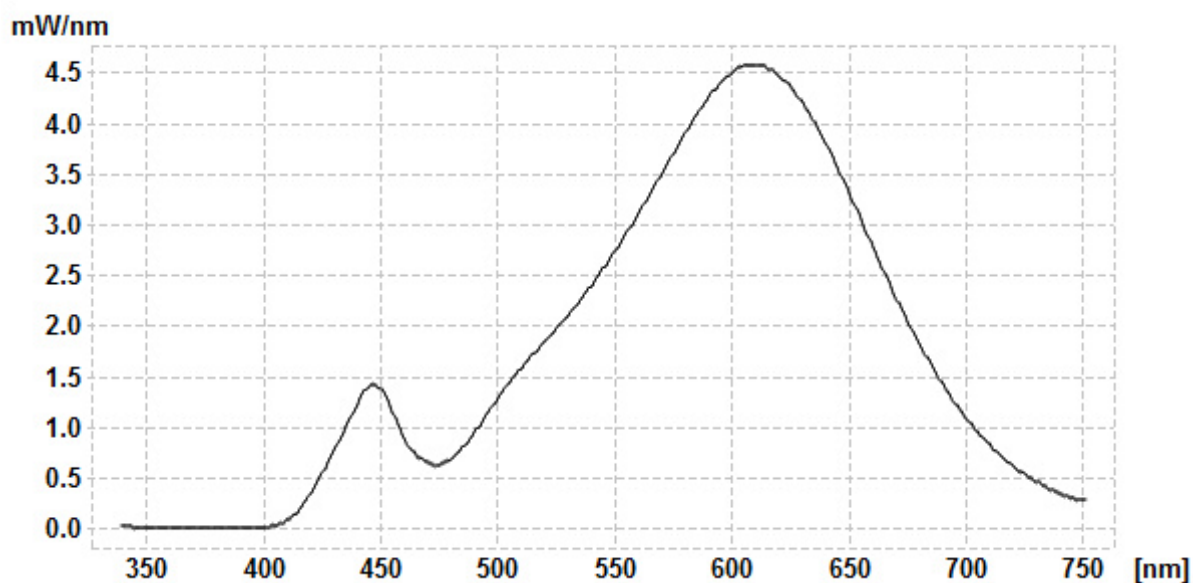

### Results

#### Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4586	x = 0,4648
y = 0,4117	y = 0,4059
Y = 219,01 lm	Y = 228,91
X = 243,99	X = 262,16
Y = 219,01	Y = 228,91
Z = 69,00	Z = 72,90

#### Andere

Correlated Color Temperature (CCT) = 2725 K  
 Chromaticity Error = 0,003  
 Color Peak = 608,70 nm  
 Color Peak Value = 4,57

Lambda2 = 132,85 nm  
Radiometric = 701,88 mW  
Color Dominant = 583,9 nm

**Farbwiedergabeindex**

Ra = 83,1

R1 = 81,0; R2 = 89,7; R3 = 97,1; R4 = 81,2; R5 = 80,7; R6 = 87,1; R7 = 84,9; R8 = 62,9; R9 = 17,8;  
R10 = 76,5; R11 = 79,6; R12 = 74,4; R13 = 82,5; R14 = 98,2