


## MEASURING REPORT

FastVoice Blog  
 Zertifizierung gemäß CIE  
 LEDARE 402-540-90  
 Datum 2014-01-07  
 Verbrauch 6,1 W  
 Powerfactor 0,7

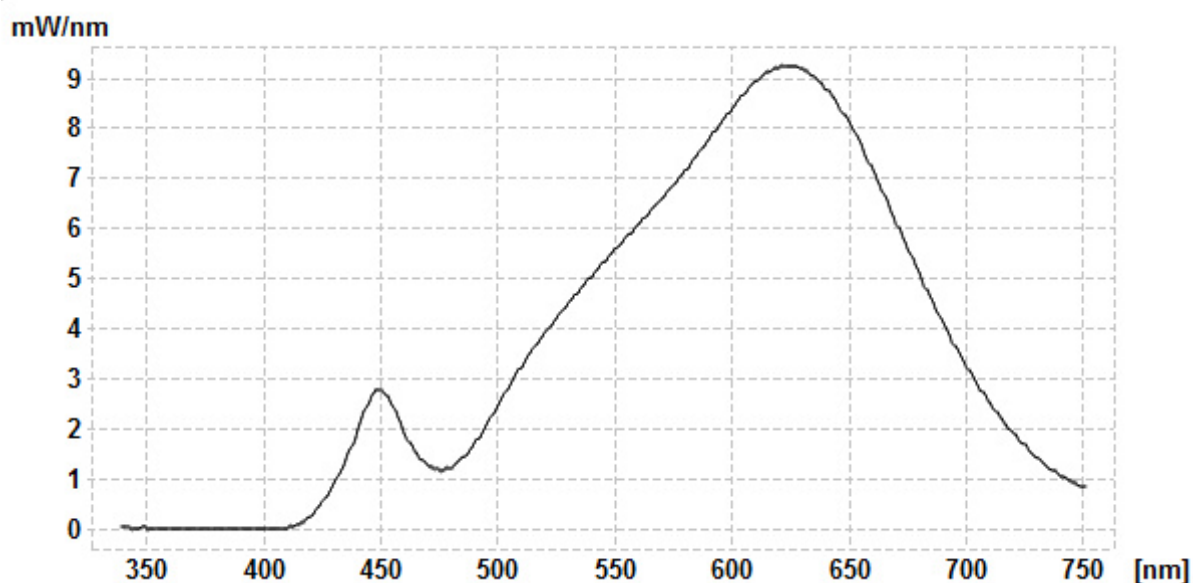

### Results

#### Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4640	x = 0,4702
y = 0,4162	y = 0,4114
Y = 433,81 lm	Y = 453,03
X = 483,61	X = 517,76
Y = 433,81	Y = 453,03
Z = 124,88	Z = 130,32

#### Andere

Correlated Color Temperature (CCT) = 2686 K  
 Chromaticity Error = 0,003  
 Color Peak = 623,92 nm

Color Peak Value = 9,24  
Lambda2 = 151,98 nm  
Radiometric = 1499,55 mW  
Color Dominant = 583,7 nm

**Farbwiedergabeindex**

Ra = 89,0

R1 = 88,6; R2 = 92,1; R3 = 94,2; R4 = 89,5; R5 = 87,4; R6 = 89,6; R7 = 91,8; R8 = 78,5; R9 = 50,4;  
R10 = 80,6; R11 = 88,9; R12 = 75,6; R13 = 89,0; R14 = 95,8