


MEASURING REPORT

FastVoice Blog
 Zertifikation gemäß CIE
 LEDARE 402-599-14
 Datum 2014-01-07
 Verbrauch 3,8 W
 Powerfactor 0,55

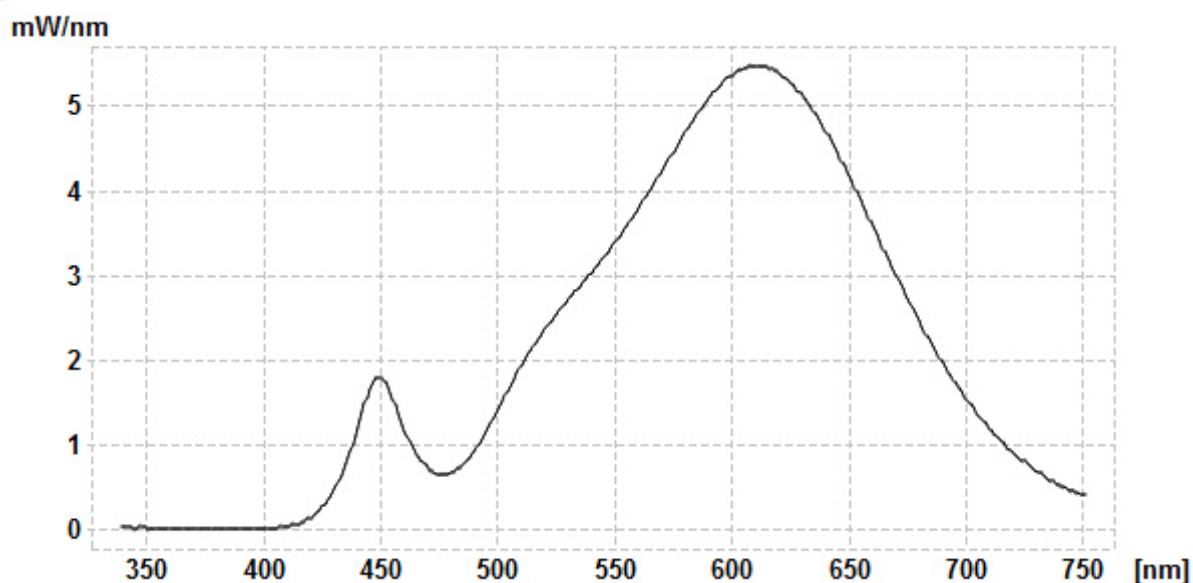

Results

Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4628	x = 0,4701
y = 0,4200	y = 0,4140
Y = 266,61 lm	Y = 278,00
X = 293,84	X = 315,66
Y = 266,61	Y = 278,00
Z = 74,41	Z = 77,80

Andere

Correlated Color Temperature (CCT) = 2730 K
 Chromaticity Error = 0,004
 Color Peak = 612,09 nm

Color Peak Value = 5,47
Lambda2 = 143,35 nm
Radiometric = 858,03 mW
Color Dominant = 583,1 nm

Farbwiedergabeindex

Ra = 83,3

R1 = 81,4; R2 = 88,5; R3 = 95,4; R4 = 82,4; R5 = 80,3; R6 = 85,0; R7 = 87,4; R8 = 66,0; R9 = 22,1;
R10 = 73,5; R11 = 80,6; R12 = 66,3; R13 = 82,4; R14 = 96,9