


## MEASURING REPORT

FastVoice Blog  
 Zertifikation gemäß CIE  
 LEDARE 802-599-07  
 Datum 2014-01-07  
 Verbrauch 3,9 W  
 Powerfactor 0,56

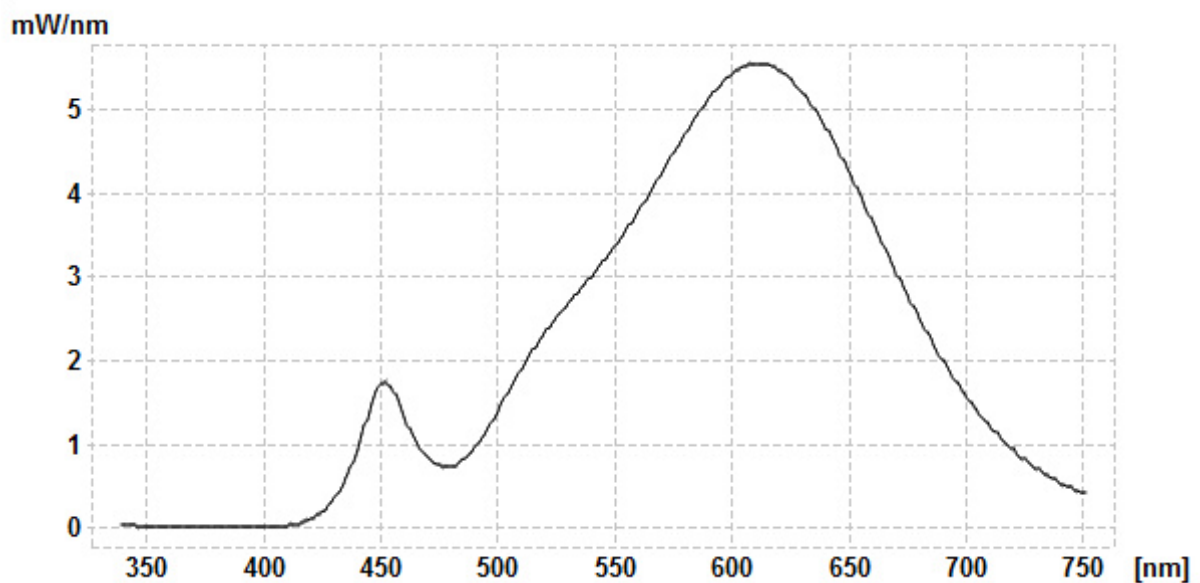

### Results

#### Farbkoordinaten

CIE 1931 2° observer	CIE 1964 10° observer
x = 0,4655	x = 0,4729
y = 0,4207	y = 0,4153
Y = 267,25 lm	Y = 278,74
X = 295,69	X = 317,37
Y = 267,25	Y = 278,74
Z = 72,28	Z = 75,03

#### Andere

Correlated Color Temperature (CCT) = 2700 K  
 Chromaticity Error = 0,004  
 Color Peak = 613,79 nm

Color Peak Value = 5,54  
Lambda2 = 141,58 nm  
Radiometric = 863,32 mW  
Color Dominant = 583,2 nm

**Farbwiedergabeindex**

Ra = 83,7

R1 = 81,7; R2 = 89,2; R3 = 96,4; R4 = 82,2; R5 = 80,6; R6 = 86,0; R7 = 87,3; R8 = 65,9; R9 = 22,8;  
R10 = 74,9; R11 = 80,2; R12 = 66,8; R13 = 82,9; R14 = 97,4