


## GL SpectroSoft Report

### Spectrum

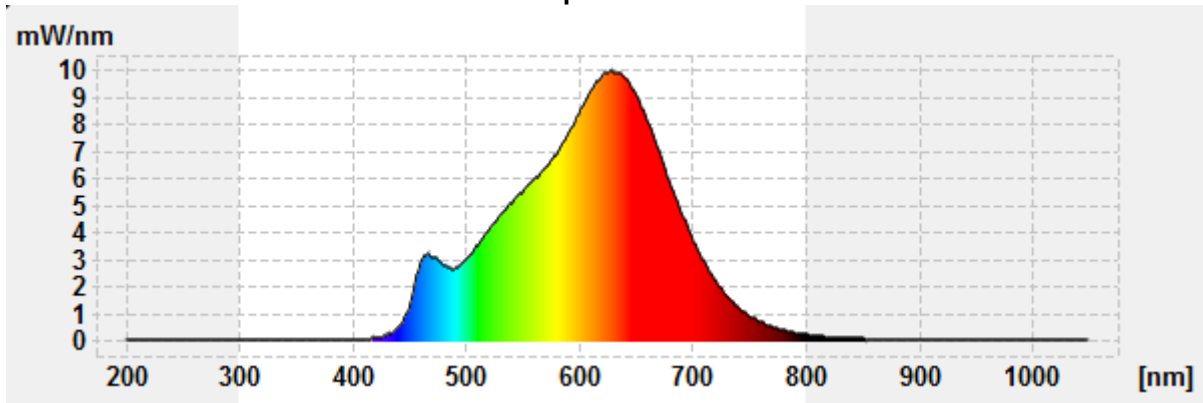

Kunde: *Fastvoice*  
 Hersteller: *MeLiTec*  
 Artikelnummer: *Spot L114*  
 Verbrauch: *6,7W*  
 Powerfaktor: *0,62*

### Results

CIE 1931 2° observer	
x	<b>0.4668</b>
y	<b>0.4198</b>
u'	0.2628
v'	0.5318
L	70.86
a	13.46
b	52.94
X	489.48
Y	<b>440.25 Lumen</b> <b>388 Lumen@ 90°</b>
Z	118.95

Other	
<b>CCT</b>	<b>2676 Kelvin</b>
Chromaticity Error	0.004
Color Peak	629.55
Color Peak Value	9.99
Color Dominant	583.5
Luminous Intensity	
Purity	0.661
Radiometric	1620.89
PAR	
PPFD	

Rendering Indices	
<b>Ra</b>	<b>94.8</b>
R1	96.6
R2	98.9
R3	98.6
R4	92.5
R5	95.1
R6	98.2
R7	91.9
R8	86.8
R9	73.2
R10	96.7
R11	94.1
R12	84.4
R13	97.6
R14	98.9

Binning	
Binning	2700K
Brightness	

Metamerism Indices	
Mivis	4.3
Miuv	2.9

### CIE 1931

